




TABLET MULTIFUNCTIONAL MICS
1.54" TOUCHSCREEN DISPLAY



DATA MET FUNCTIONS

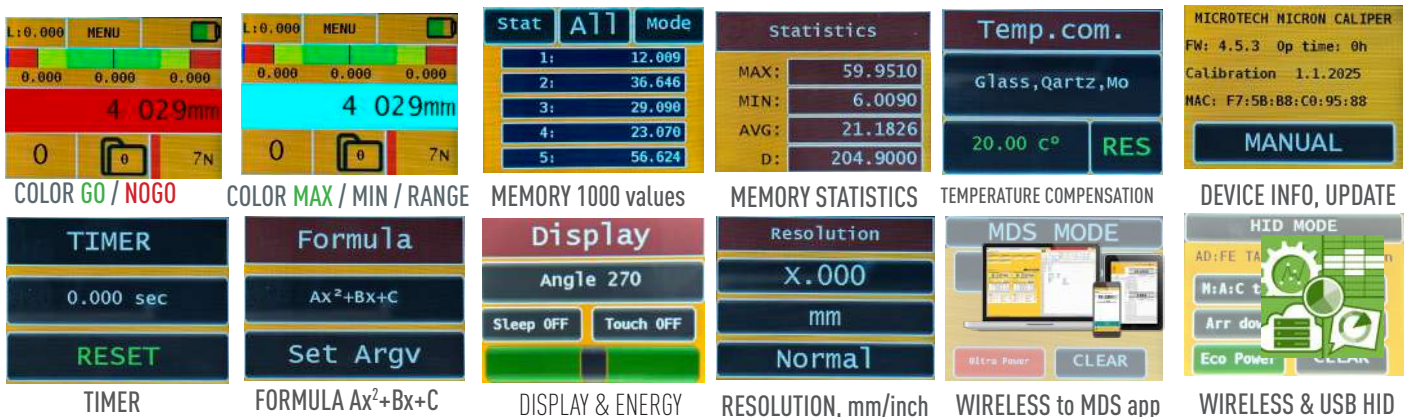

TIMER

FORMULA Ax^2+Bx+C

DISPLAY & ENERGY

RESOLUTION, mm/inch

WIRELESS to MDS app

WIRELESS & USB HID

- **Industry 4.0** adopted E-Force caliper with computerized MICS system (Patents US10184772, UA174949, UA126928)
- Modification with Upper and Lower carbide jaws
- **Min Resolution 0.005mm** (0,01/0,1mm selection)
- **Functions:** Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution select, Connection indication
- **Memory manager:** 1000 values, Statistics mode, Memory data transfer
- **E-Force** control module with Force selection 1-20N, color indication, AUTO-Force mode, Force indication
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))

DataMet E-FORCE CALIPER


Item No	Range		Resolution	Accuracy*	eForce	Jaws	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr.	Calibr date	Recharge	Auto off	Memory	Statistics	WIRELESS	USB HID
	mm	inch																		
141077015A	0-150	0-6"	0,005	±10	1-20	40/16	•	•	•	•	•	•	•	•	•	•	1000 val	•	•	•
141077020A	0-200	0-8"		±10		50/17	•	•	•	•	•	•	•	•	•	•		•	•	•
141077030A	0-300	0-12"		±15		60/20	•	•	•	•	•	•	•	•	•	•		•	•	•

CARBIDE DataMet E-FORCE CALIPER

Item No	Range		Resolution	Accuracy*	eForce	Jaws	CARBIDE	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr.	Calibr date	Recharge	Auto off	Memory	Statistics	WIRELESS	USB HID
	mm	inch																			
141077015C	0-150	0-6"	0,005	±10	1-20	40/16	•	•	•	•	•	•	•	•	•	•	•	1000 val	•	•	•
141077020C	0-200	0-8"		±10		50/17	•	•	•	•	•	•	•	•	•	•	•		•	•	•
141077030C	0-300	0-12"		±15		60/20	•	•	•	•	•	•	•	•	•	•	•		•	•	•



DELIVERY SET

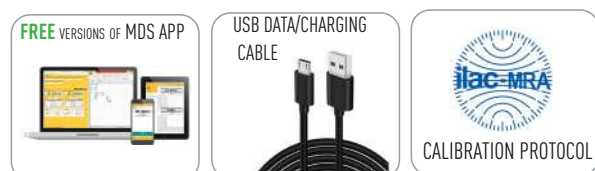

OPTIONAL

